



## Available colors

### ReSound Nexia and ReSound OMNIA Customs



### ReSound LiNX Quattro Customs



### ReSound custom red and blue shell colors



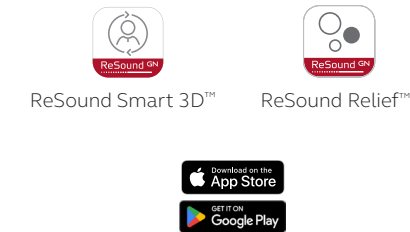
### ReSound Nexia (RIE, BTE) and ReSound OMNIA (RIE, BTE)



### Resound Enzo Q and ReSound LiNX Quattro BTE colors



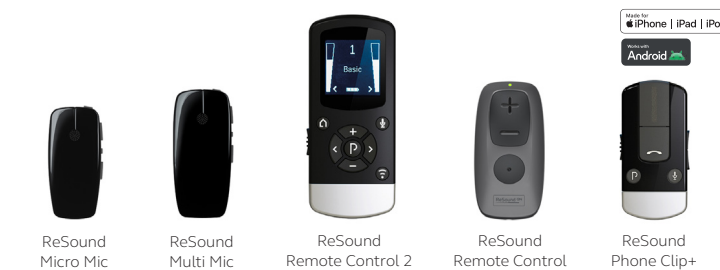
## ReSound apps



## Chargers



## ReSound wireless accessories



\*TV-Streamer+ is compatible with ReSound Nexia.

### ReSound Government Services

8001 E Bloomington Freeway  
Bloomington, MN 55420  
USA  
1-800-392-9932  
gs.resound.com

© 2024 The GN ReSound Group, all rights reserved. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast™ word mark and logos are trademarks owned by Bluetooth SIG, Inc. Apple, iPad, iPhone and iPod touch are trademarks of Apple Inc, registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android and Google Play are registered trademarks of Google Inc. The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.

MK605239 Rev S 2024.03



# Quick reference guide






Government Services  
May 1-October 31, 2024

## Quick reference support

ReSound Government Services: 800-392-9932  
Government Services Consumer Support Line: 888-879-7036








ReSound Nexia RIE and BTE models





| Models                                                                                                                                   | Fitting range                                                                     | Max Output/Gain                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <br>Micro RIE 60S<br>Lithium-ion                        |  | M&RIE: 115/53<br>Low power: 114/54<br>Medium power: 116/59<br>High power: 120/63<br>Ultra power: 130/73                    |
| <br>Mini RIE 61<br>312                                  |  |                                                                                                                            |
| <br>Standard RIE 62(T)<br>13                            |  |                                                                                                                            |
| <br>Micro RIE 60S<br>CROS Transmitter<br>Lithium-ion    | Compatible with:<br>Lower power<br>Medium power<br>High power                     |                                                                                                                            |
| <br>Standard BTE 77<br>Lithium-ion                      |  | Open: 127/53<br>Closed: 128/60                                                                                             |
| <br>Power BTE 88<br>Plastic or Metal Hook<br>Lithium-ion |  | Power: 133/67<br>High Power: 133/73<br><br>BTE 88 can be configured<br>with plastic or metal hook in<br>ReSound Smart Fit™ |

(T)=Telecoil



ReSound OMNIA RIE and BTE models

| Models                                                                                                                                    | Fitting range                                                                       | Max Output/Gain                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <br>Mini RIE 60<br>Lithium-ion                           |  | M&RIE: 115/53<br>Low power: 113/53<br>Medium power: 116/58<br>High power: 122/65<br>Ultra power: 130/75                    |
| <br>RIE 61<br>Lithium-ion                                |  |                                                                                                                            |
| <br>Mini RIE 61<br>312                                   |  |                                                                                                                            |
| <br>Standard RIE 62<br>13                                |  |                                                                                                                            |
| <br>Standard BTE 77<br>Lithium-ion                       |  |                                                                                                                            |
| <br>Power BTE 88<br>Plastic or Metal Hook<br>Lithium-ion |  | Power: 133/67<br>High Power: 133/73<br><br>BTE 88 can be configured<br>with plastic or metal hook in<br>ReSound Smart Fit™ |


ReSound Nexia and ReSound OMNIA custom models

| Models                                                                                                               | Fitting range                                                                       | Max Output/Gain                                                                        |
|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <br>Half Shell/ITC<br>Lithium-ion |  | Low power: 114/40<br>Medium power: 118/50<br>High power: 121/60<br>Ultra power: 130/70 |
| <br>Full Shell<br>Lithium-ion     |  |                                                                                        |
| <br>CIC non wireless<br>10A       |  | Low Power: 114/40<br>Medium Power: 116/50<br>High Power: 121/60                        |
|                                                                                                                      |  |                                                                                        |
| <b>Fitting Range Key</b><br>LP and MP: Mild - Moderate<br>HP: Moderate - Severe<br>UP: Severe - Profound             |                                                                                     |                                                                                        |




ReSound ENZO Q BTE models

| Models                                                                                                                       | Fitting range                                                                       | Max Output/Gain |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| <br>High Power BTE 88<br>Metal Hook<br>13 |  | Power: 134/73   |
| <br>Super Power BTE 98<br>675             |  | Power: 141/83   |

ReSound LiNX Quattro BTE

| Models                                                                                                       | Fitting range                                                                       | Max Output/Gain                |
|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------|
| <br>Standard BTE 77<br>13 |  | Open: 128/52<br>Closed: 126/57 |

ReSound LiNX Quattro custom models

| Models                                                                                                  | Fitting range                                                                       | Max Output/Gain                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>ITC<br>312       |  | Low power: 114/40<br>Medium power: 118/50<br>High power: 120/60<br>Ultra power: 129/70<br><br>Low power not available for<br>MIH or ITC with Telecoil. |
| <br>ITE-HS<br>312/13 |  | Medium Power: 118/50<br>High Power: 120/60<br>Ultra Power: 129/70                                                                                      |
| <br>ITE-FS<br>312/13 |  |                                                                                                                                                        |

**Fitting Range Key**  
LP and MP: Mild - Moderate  
HP: Moderate - Severe  
UP: Severe - Profound